


















CAMINO COMPACT SERIES HYDRO WOOD PELLET BOILER



FEATURES

-  High efficiency and elegant design
-  Long lasting steel body
-  Combustion with draught fan
-  Automatic fuel feed system
-  Automatic ignition system
-  Remote control
-  Advanced weekly timer
-  Modulation with flue temperature
-  Back burn protection system
-  Control panel with modulation
-  Strong insulation with glass wool and ceramic
-  Circulation Pump, Expansion Vessel, Safety Valve are installed on the product and are included in price.
-  Optional: Wi-fi Modul.
-  Optional: 3 or 4 way motorized valve or buffer tank control and hot water tank control card.

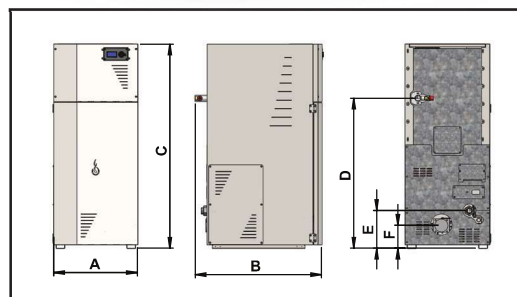

ТЕХНИЧЕСКИ ХАРАКТЕРИСТИКИ

MODEL		CAMINO COMPACT-15	CAMINO COMPACT-25	CAMINO COMPACT-35
Capacity Range	k W	5-15	5-25	5-35
Width (A)	mm	480	520	550
Length (B)	mm	755	780	850
Height (C)	mm	1110	1260	1330
Hot Water Outlet Height (D)	mm	780	925	1000
Cold Water Inlet Height (E)	mm	235	235	235
Flue Outlet Height (F)	mm	150	150	135
Flue Diameter	mm	80	80	127
Flow-return	inç	1	1	1
Expansion Outlet	inç	1/2	1/2	1/2
Fill-Empty	inç	1/2	1/2	1/2
Weight	kg	142	155	
Water Volume	lt	22	35	41
Hopper Capacity	lt	72	87	98
Ash Removal Box Capacity	lt	2	2	2
Max. Operation Pressure	bar	3	3	3
Test Pressure	bar	4,3	4,3	4,3
Temperature Control Limit	°C	40-85	40-85	40-85
Max. Operating Temperature	°C	90	90	90
Reducer Motor Power	W	50	50	50
Fan Power	W	50	50	50
Operating Power & Frequency	V/Hz	230/50	230/50	230/50
Operating Amber	A	6	6	6
Fuel Consumption	kg/h	1,1-3,3	1,1-5,6	1,1-8