
















CAMINO SERIES HYDRO WOOD PELLET STOVE



FEATURES

-  High efficiency and elegant design
-  Long lasting steel body
-  Combustion with draught fan
-  Automatic fuel feed system
-  Automatic ignition system
-  Remote control
-  Advanced weekly timer
-  Modulation with flue temperature
-  Back burn protection system
-  Control panel with modulation
-  Strong insulation with glass wool and ceramic
-  Circulation Pump, Expansion Vessel, Safety Valve are installed on the product and are included in price.

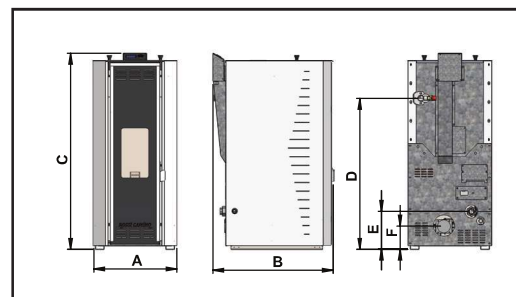

ТЕХНИЧЕСКИ ХАРАКТЕРИСТИКИ

MODEL		CAMINO-15	CAMINO-25	CAMINO-35
Capacity Range	k W	5-15	5-25	5-35
Width (A)	mm	485	525	555
Length (B)	mm	735	750	820
Height (C)	mm	1050	1200	1270
Hot Water Outlet Height (D)	mm	780	925	1000
Cold Water Inlet Height (E)	mm	235	235	235
Flue Outlet Height (F)	mm	150	150	135
Flue Diameter	mm	80	80	127
Flow-return	inç	1	1	1
Expansion Outlet	inç	1/2	1/2	1/2
Fill-Empty	inç	1/2	1/2	1/2
Weight	kg	137	150	
Water Volume	lt	22	35	41
Hopper Capacity	lt	65	80	90
Ash Removal Box Capacity	lt	2	2	2
Max. Operation Pressure	bar	3	3	3
Test Pressure	bar	4,3	4,3	4,3
Temperature Control Limit	°C	40-85	40-85	40-85
Max. Operating Temperature	°C	90	90	90
Reducer Motor Power	W	50	50	50
Fan Power	W	50	50	50
Operating Power & Frequency	V/Hz	230/50	230/50	230/50
Operating Amber	A	6	6	6
Fuel Consumption	kg/h	1,1-3,3	1,1-5,6	1,1-8